


AXF 80W-90 Cod. 2742

DESCRIPTION

Lubricant with Extreme Pressure (E. P.) and Limited Slip (L.S.) characteristics specifically developed for axles of earth moving machines equipped with oil bath brakes and limited slip differentials.

CHARACTERISTICS

- | Ensures maximum efficiency of braking systems in any operating conditions and temperatures. Eliminates possible noise produced by oil bath brakes.
- | Maximum anti-wear protection ensures longer life of transmission components (differentials, wheel final drives...) even when there is limited lubrication present.
- | The lubricant's particular viscosity allows it to reduce power loss to a minimum and enhance the axels' efficiency even at low temperatures.
- | Its specific formulation guarantees the lubricant's excellent thermal stability and ensures its characteristics remain unchanged even in the most extreme operating conditions, helping to reduce heat generated during severe operation.

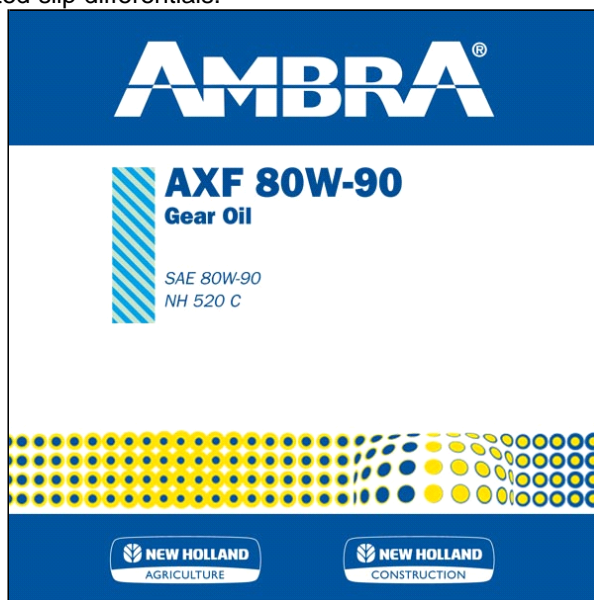

ADVICE ON USE

AXF is available in the SAE 80W/90 grade this makes it suitable for use in all types of season. To be changed according to manufacturer's instruction.

TECHNICAL DATA

SAE 80W-90, API GL 5, GTG LLP-007, NH 520 C,
ZF TE-ML 05C, ZF TE-ML 12C, ZF TE-ML 16E,
ZF TE-ML 21C, MIL-L-2105 D Performance